


Lodge

Porcelain wood effect - plank and relief formats

Lodge captures the natural warmth and grain of timber in a durable porcelain collection. Two oak-inspired tones are offered across long planks and a coordinating relief format, allowing floors and feature walls to share a consistent material language.



COLOURS & SURFACES

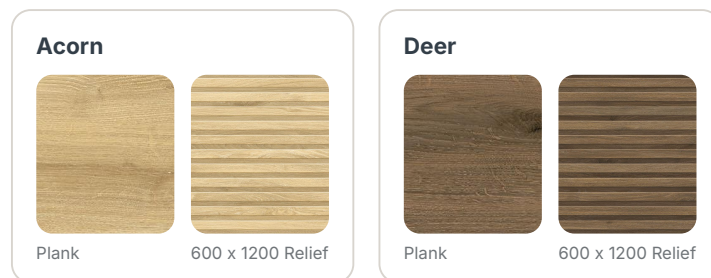

AVAILABLE FORMATS

200 x 1200 mm / 250 x 1500 mm / 600 x 1200 mm Relief

Rectified porcelain throughout. Plank formats are Matt R10. The 600 x 1200 mm option has a distinct three-dimensional relief surface, shown separately above.

Application: Interior floors and walls. For wet, slip-sensitive or external applications, please contact Appleton Brooks for advice.

Lodge

Format-specific technical specification

SPECIFICATION TABLE

Size	Finish	Thickness	Colour availability	Rectified	R Classification DIN 51130
200 x 1200 mm	Matt	9 mm	Acorn, Deer	Yes	R10
250 x 1500 mm	Matt	10.5 mm	Acorn, Deer	Yes	R10
600 x 1200 mm	Relief	9 mm	Acorn, Deer	Yes	-

The promoted 200 x 1200 mm and 250 x 1500 mm Matt plank formats are classified R10. No R or PTV value is stated for the promoted 600 x 1200 mm relief format, and none has been inferred.

SPECIFICATION NOTES

- All promoted Lodge products are classified V3 for shade variation.
- Slip resistance differs by format: refer to the R classification shown for the specific format being specified.
- For advice on selecting the most appropriate format for your project, please contact Appleton Brooks.

ENVIRONMENTAL CREDENTIALS

EPD

Verified EPD

A verified Environmental Product Declaration is published under the ISO 14025 framework.

Environmental management

ISO 14001

An integrated environmental management system is certified to ISO 14001.

Recycled content

ISO 14021

Pre-consumer recycled-content declarations are made in accordance with ISO 14021.

Environmental statements above are manufacturer-level credentials applicable to the production source. Supporting documentation is available on request.